



Service Info

Diamond washer for crankshaft vibration damper

Manufacturers: Audi, Volvo, VW

Model:

Audi: A6
Volvo: 850, S70, S80, V70
VW: Crafter, LT, T4

Engine: 2,5 TDI

Part no.: 530 0172 10
530 0482 09
530 0482 10
530 0483 09
530 0483 10
530 0484 09
530 0484 10

OE number: 074 105 193

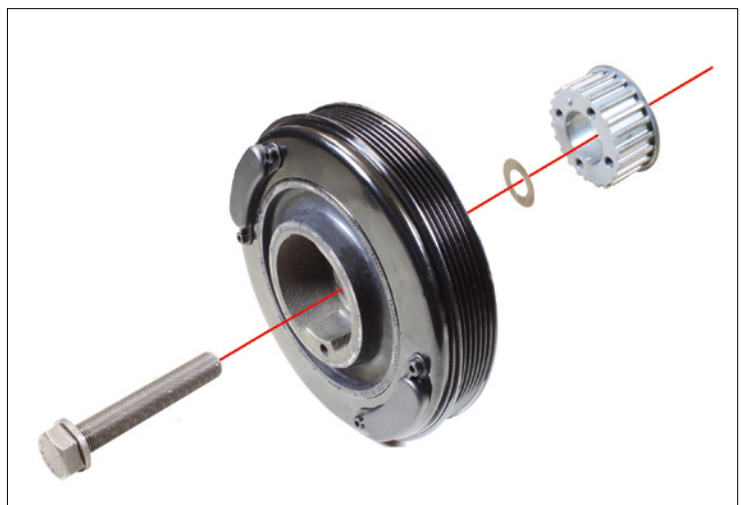


Image 1: crankshaft vibration damper with crankshaft central bolt and diamond washer

The crankshaft vibration damper must be removed when replacing the timing belt on the vehicles listed above.

According to the vehicle manufacturer specifications, the central bolt on the crankshaft and the diamond washer (image 1) must be changed when replacing or disassembling the crankshaft vibration damper.

The central bolt on the crankshaft and the washer are included in the timing belt kits and timing belt sets listed above. The washer provided in these kits and sets has a special coating that works in conjunction with the central screw to prevent the vibration damper from working itself loose.

Observe the specifications of the vehicle manufacturer!

Spare parts and technical information can be found under www.schaeffler-aftermarket.com or www.RepXpert.com.

Phone: +44 (0) 14 32 264 264*
Fax: +44 (0) 14 32 375 760
hfd-info@schaeffler.com
www.schaeffler-aftermarket.com

* Calls from within the UK 08457 001100

SCHAEFFLER
AUTOMOTIVE AFTERMARKET

